



Water Leak Sensor

Reference Manual

TBWL100-915

TBWL100-868

Model Name: TBWL100

Table of Contents


1. Description	1
2. Specifications	2
2.1 Mechanical	2
2.1.1 Sensor	2
2.2 Environmental	2
2.3 Radio	2
2.4 Certifications and Conformity	3
2.5 Power	2
2.6 User Interface	2
2.7 Additional Features	3
3. Operation	3
3.1 Transport Mode	3
3.2 Default Operation	3
4. Messages	3
4.1 Status	3
4.1.1 Triggers	3
4.1.2 Payload	3
4.1.3 Payload (continue)	4
5. Battery	5
5.1 Replacement	5
5.2 Cautions	5
6. Label format information	6
6.1 Round label	6
6.1.1 All QR code	6
6.1.2 JoinEUI	6
6.1.3 DevEUI	6
6.1.4 Model number	6
6.1.5 Factory check code	7
6.1.6 Model Name	7
6.2 PE Bag & Back Label Label Barcode	7
7. Important Product & Safety Instructions	8
8. Warnings	9
9. Notices	10
10. Cautions	10
11. Regulatory	11
11.1 Federal Communication Commission Interference Statement	11
11.2 Industry Canada statement:	12
12. Accessories handling	13
Appendix. Configuration Downlink Command	14
Appx. 1 Payload	14
Appx. 1.2 Command Description	15
Appx. 2 Response Content	15
Appx. 3 Frame Count 0 Content	15

1. Description

The Water Leakage Sensor utilizes LoRaWAN connectivity to send an uplink notification when a water leak is detected.

2. Specifications

2.1 Mechanical

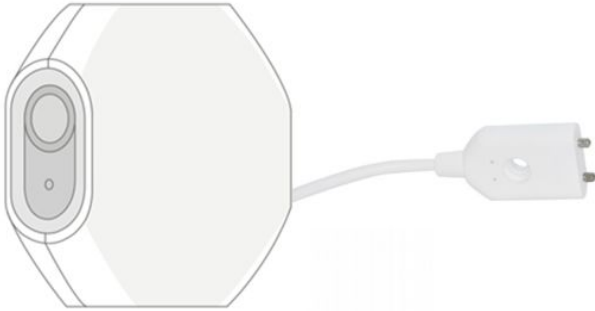

2.1.1 Sensor

Length x Width x Height	50mm x 20mm x 50mm
Weight	30g without battery 40g with battery
Sensor	<ul style="list-style-type: none"> • Combined with temperature, humidity, and water leak detection functions • Long cable for detection can be easily changed • To avoid expensive repairs and loss of treasured items
Detachable probe	Micro-USB connector

2.2 Environmental

Temperature	0°C to +50°C
IP Rating	IP 50 equivalent

2.3 Radio

Frequency	<ul style="list-style-type: none"> • 863–870MHz for EU • 902–928MHz for North America
Tx Power	US: +19dBm EU: +17dBm
Rx Sensitivity	-135dBm
Antenna Gain	-2dBi Peak, -5dBi Avg

2.4 Certifications and Conformity

FCC ID: pending
IC:
CE
ROHS REACH

2.5 Power

Source	3.6V 1/2 AA Li-SOCI2 1200mAh battery
Maximum Voltage	3.6V
Minimum Voltage	3.1V
Current	135mA maximum/ 100uA minimum

2.6 User Interface

LEDs	One blue LED
Water Leakage Sensor	One Water Leakage Sensor

2.7 Additional Features

Battery Monitoring

3. Operation

3.1 Transport Mode

Sensors are shipped with a plastic battery insulating pull tab that must be removed before the operation.

3.2 Default Operation

While in default operation, the device will send a join request message after booting for a minute. After joining successfully, the device will detect water leakage every 5 minutes. Once the sensor detects water leakage, it will send a status message immediately.

4. Messages

LoRaWAN Packets for this device use port 106.

4.1 Status

4.1.1 Triggers

Packet Triggers: 60-minute inactivity, ± 2 °C delta, ± 5 %RH Delta, water leakage detection per 5 minutes

4.1.2 Payload

Port	106
Payload Length	5 bytes

Bytes	0	1	2	3	4
Field	Status	Battery	Temp (PCB)	RH	Temp (Environment)

4.1.3 Payload (continue)

Status	<p>Sensors status</p> <p>Bit [0] 1 – Water leakage detected, 0 – Dry</p> <p>Bits [3:1] RFU</p> <p>Bits[4] 1 - Water leakage Interrupt</p> <p>Bits[5] 1 - Temperature status is changed (2°C delta)</p> <p>Bits[6] 1 - RH status is changed (5% RH delta)</p> <p>Bits[7] RFU</p>
Battery	<p>Battery level</p> <p>Bits [3:0] unsigned value v, range 1 – 14; battery voltage in V = (25 + v) ÷ 10.</p> <p>Bits [7:4] RFU</p>
Temp (PCB)	<p>Temperature as measured by on-board NTC</p> <p>Bits [6:0] unsigned value τ, range 0 – 127; temperature in °C = τ - 32.</p> <p>Bit [7] RFU measurement range -32 to 95°C</p>
RH	<p>Relative humidity as measured by a digital sensor</p> <p>Bits [6:0] unsigned value in %, range 0-100. The value 127 indicates measurement error.</p> <p>Bit [7] RFU</p>
Temp. (Environment)	<p>The temperature is measured by the temp. sensor</p> <p>Bits [6:0] unsigned value τ, range 0 – 127; temperature in °C = τ - 32.</p> <p>Bit [7] RFU measurement range -32 to 95°C</p>

5. Battery

5.1 Replacement

Use ER14250 or equivalent.
Remove the upper cap and replace the battery.



5.2 Cautions

CAUTION: Disposal of a battery (or battery pack) into a fire or a hot oven, or mechanically crushing or cutting of a battery (or battery pack) can result in an EXPLOSION!

Leaving a battery (or battery pack) in an extremely high temperature surrounding environment that can result in an EXPLOSION or leakage of flammable liquid or gas.

A battery (or battery pack) subjected to extremely low air pressure may also result in an EXPLOSION or leakage of flammable liquid or gas.

Discard used batteries according to the manufacturer's instructions.

CAUTION: The unit is provided with a battery-powered circuit.


There is a danger of explosion if the battery is incorrectly replaced.

Replace only with the same or equivalent type recommended by the manufacturer. Discard used batteries according to the manufacturer's instructions.

Risk of Explosion if Battery is replaced by an Incorrect Type. Dispose of Used Batteries According to the Instructions.

6. Label format information

6.1 Round label

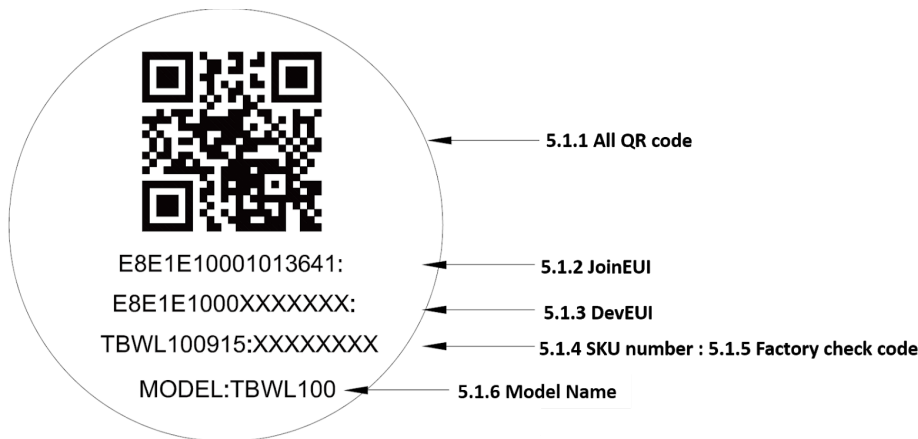

6.1.1 All QR code

[URN:LWDP:E8E1E10001013641:E8E1E1000XXXXXXX:TBSL100915:XXXXXXX.](#)

The total maximum resulting character sentence is 72 alphanumeric characters long.

6.1.2 JoinEUI

900MHz: [E8E1E10001013641. \(US/AU/AS923/BR\)](#)

800MHz: [E8E1E10001013642. \(EU/IN/RU\)](#)

Uses a hexadecimal representation resulting in 16 characters.

6.1.3 DevEUI

[E8E1E1000XXXXXXX.](#)

Uses a hexadecimal representation resulting in 16 characters

6.1.4 Model number

TBWL100915

Sensor's model name

915 for US/AU/AS923/BR
868 for EU/IN/RU

Non-reserved characters(except ":" and space) with a maximum length of 20 characters.

6.1.5 Factory check code

XXXXXXXX.


Checksum of the factory production line.

6.1.6 Model Name

MODEL:TBWL100.

Fixed code, not including in QR code.

6.2 PE Bag & Back Label Label Barcode

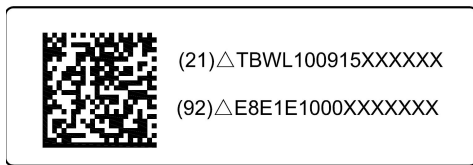

PE Bag Label



Back Label

Definition of Back Label and PE Bag Barcode Label:

GS1 DataMatrix

- The GS1 Application Identifier (21) indicates that the GS1 Application Identifier data field contains a serial number.
- The GS1 Application Identifier (92) assigned to the company's internal information is DevEUI.



: Caution! For more information please refer to chapter 5.2 and chapter 10.

7. Important Product & Safety Instructions

For the most current and more detailed information about Tabs features and settings as well as safety instructions, please download the user manual for the products online at www.browan.com before the use of any Tabs products or services.

Certain sensors contain magnets. **Keep away from ALL Children!** Do not put in nose or mouth. Swallowed magnets can stick to intestines causing serious injury or death. Seek immediate medical attention if magnets are swallowed.

These products are not toys and contain small parts that can be dangerous to children under 3 years old. Do not allow children or pets to play with products.

Observe proper precautions when handling batteries. Batteries may leak or explode if improperly handled.

Observe the following precautions to avoid a sensor explosion or fire:

- Do not drop, disassemble, open, crush, bend, deform, puncture, shred, microwave, incinerate or paint the sensors, Hub or other hardware.
- Do not insert foreign objects into any opening on the sensors or Hub, such as the USB port.
- Do not use the hardware if it has been damaged—for example, if cracked, punctured or harmed by water. Disassembling or puncturing the battery (whether integrated or removable) can cause an explosion or fire.
- Do not dry the sensors or battery with an external heat source such as a microwave oven or hairdryer.

8. Warnings

- Do not place naked flame sources, such as lighted candles, on or near the equipment.
- The battery shall not be exposed to excessive heat such as sunshine, fire or the like.
- Do not dismantle, open or shred battery pack or cells.
- Do not expose batteries to heat or fire. Avoid storage in direct sunlight.
- Do not short-circuit the battery. Do not store batteries in a box or drawer where they may short-circuit each other or be short-circuited by other metal objects.
- Do not remove a battery from its original packaging until required for use.
- Do not subject batteries to mechanical shock.
- In the event of a battery leaking, do not allow the liquid to come in contact with the skin or eyes. If contact has been made, wash the affected area with copious amounts of water and seek medical advice.
- Do not use any charger other than that specifically provided for use with the equipment.
- Observe the plus (+) and minus (-) marks on the battery and equipment and ensure correct use.
- Do not use any which is not designed for use with the product.
- Do not mix cells of different manufacture, capacity, size or type within a device.
- Keep batteries out of the reach of children.
- Seek medical advice immediately if a battery has been swallowed.
- Always purchase the correct battery for the equipment.
- Keep batteries clean and dry.
- Wipe the battery terminals with a clean dry cloth if they become dirty.

9. Notices

- Avoid exposing your sensors or batteries to very cold or very hot temperatures. Low or high temperature conditions may temporarily shorten the battery life or cause the sensors to temporarily stop working.
- Take care in setting up the Hub Gateway and other hardware. Follow all installation instructions in the User Guide. Failure to do so may result in injury.
- Do not install hardware equipment while standing in water or with wet hands. Failure to do so can result in electric shock or death. Use caution when setting up all electronic equipment.
- When charging the sensors, do not handle the sensors with wet hands. Failure to observe this precaution could result in electric shock.
- PROP 65 WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm
- Cleaning Tabs Products: Use a clean dry cloth or wipe to clean Tabs products. Do not use detergent or abrasive materials to clean the Tabs products, as this may damage the sensors.

10. Cautions

CAUTION: Disposal of a battery (or battery pack) into a fire or a hot oven, or mechanically crushing or cutting of a battery (or battery pack) can result in an **EXPLOSION!**

Leaving a battery (or battery pack) in an extremely high temperature surrounding environment that can result in an **EXPLOSION** or leakage of flammable liquid or gas.

A battery (or battery pack) subjected to extremely low air pressure may also result in an **EXPLOSION** or leakage of flammable liquid or gas.

Discard used batteries according to the manufacturer's instructions.



CAUTION: The unit is provided with a battery-powered circuit.

There is a danger of **EXPLOSION** if the battery is incorrectly replaced.

Replace only with the same or equivalent type recommended by the manufacturer. Discard used batteries according to the manufacturer's instructions.

Risk of **EXPLOSION** if Battery is replaced by an Incorrect Type. Dispose of Used Batteries According to the Instructions.

11. Regulatory

	<p>Hereby, Browan Communications Inc. declares that the radio equipment for Tabs products is in compliance with Directive 2014/53/EU.</p> <p>This device complies with Part 15 of the FCC Rules and RSS Standards of Industry Canada. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.</p>
	<p>This symbol means that according to local laws and regulations your product should be disposed of separately from household waste. When this product reaches its end of life, take it to a collection point designated by local authorities. Some collection points accept products for free. The separate collection and recycling of your product at the time of disposal will help conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment.</p>

11.1 Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

IMPORTANT NOTE:

Radiation Exposure Statement:

The product complies with the US portable RF exposure limit set forth for an uncontrolled environment and is safe for intended operation as described in this manual. The further RF exposure reduction can be

achieved if the product can be kept as far as possible from the user body or set the device to lower output power if such a function is available.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

11.2 Industry Canada statement:

This device contains license-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's license-exempt RSS(s). Operation is subject to the following two conditions :

- (1) This device may not cause interference
- (2) This device must accept any interference, including interference that may cause undesired operation of the device

Cet appareil contient des émetteurs / récepteurs exempts de licence qui sont conformes au (x) RSS (s) exemptés de licence d'Innovation, Sciences et Développement économique Canada. L'opération est soumise aux deux conditions suivantes :

- (1) Cet appareil ne doit pas causer d'interférences
- (2) Cet appareil doit accepter toute interférence, y compris les interférences pouvant provoquer un fonctionnement indésirable de l'appareil

The product complies with the Canada portable RF exposure limit set forth for an uncontrolled environment and are safe for intended operation as described in this manual. The further RF exposure reduction can be achieved if the product can be kept as far as possible from the user body or set the device to lower output power if such a function is available.

This equipment should be installed and operated with minimum distance 0cm between the radiator & your body.

Déclaration d'exposition aux radiations :

Le produit est conforme aux limites d'exposition pour les appareils portables RF pour les Etats-Unis et le Canada établies pour un environnement non contrôlé. Le produit est sûr pour un fonctionnement tel que décrit dans ce manuel. La réduction aux expositions RF peut être augmentée si l'appareil peut être conservé aussi loin que possible du corps de l'utilisateur ou que le dispositif est réglé sur la puissance de sortie la plus faible si une telle fonction est disponible.

Cet équipement doit être installé et utilisé avec un minimum de 0 cm de distance entre le radiateur et votre corps.

12. Accessories handling

Recovery procedure for detachable probe:

1. Wipeout water on the device.
2. Use a hairdryer to dry the device at a distance of approximately 2~3 cm each side, for about 30~40 seconds.

Note: Hairdryer output air temperature should be about 75~80 °C

Appendix. Configuration Downlink Command

Port	204
------	-----

Appx. 1 Payload

Bytes	0	1~4
Field	Cmd	Config

Cmd	Command	1 byte																		
	Bit [7:0]	<p>0x00 – Set keep-alive interval. default value : => 3600 sec value range : 15~65535</p> <p>0x01 – Set temperature delta. default value : 2(°C) value range : 0~100</p> <p>0x02 – Set RH delta. default value : 5(%RH) value range : 0~100</p> <p>0x03 - Set sensor detection interval. default value : 300 sec value range : 15~65535</p> <p>Note: If sensor detection interval is more than keep alive interval,the sensor detection interval will replace the keep alive interval.</p>																		
Config	Configuration	0~2 bytes																		
	See the table as follows:																			
	<table border="1"> <thead> <tr> <th>Cmd</th> <th>Command Description</th> <th>Config Length</th> </tr> </thead> <tbody> <tr> <td>0x00</td> <td>Get Sensor Configuration (Only for unconfirmed downlink)</td> <td>0 bytes</td> </tr> <tr> <td>0x00</td> <td>Set keep-alive interval *Note: little-endian format.</td> <td>2 bytes</td> </tr> <tr> <td>0x01</td> <td>Set temperature delta</td> <td>1 byte</td> </tr> <tr> <td>0x02</td> <td>Set RH delta</td> <td>1 byte</td> </tr> <tr> <td>0x03</td> <td>Set sensor detection interval *Note: little-endian format.</td> <td>2 bytes</td> </tr> </tbody> </table>		Cmd	Command Description	Config Length	0x00	Get Sensor Configuration (Only for unconfirmed downlink)	0 bytes	0x00	Set keep-alive interval *Note: little-endian format.	2 bytes	0x01	Set temperature delta	1 byte	0x02	Set RH delta	1 byte	0x03	Set sensor detection interval *Note: little-endian format.	2 bytes
Cmd	Command Description	Config Length																		
0x00	Get Sensor Configuration (Only for unconfirmed downlink)	0 bytes																		
0x00	Set keep-alive interval *Note: little-endian format.	2 bytes																		
0x01	Set temperature delta	1 byte																		
0x02	Set RH delta	1 byte																		
0x03	Set sensor detection interval *Note: little-endian format.	2 bytes																		

Appx. 1.2 Command Description

Payload Content	Command content
	Ex: 00100E 0120 0230 031E00
	00 100E => Set keep alive interval : 0x0E10 -> 3600 sec 01 20 => Set temperature delta : 0x20 -> 32 02 30 => Set RH delta : 0x30 -> 48 03 1E00 => Set detection interval : 0x001E -> 30 sec

Appx. 2 Response Content

(Only for unconfirmed downlink)

Port	204
Payload Length	10 bytes

Payload Content	Response content
	Ex: 00100E01200230031E00
	00 100E => Keep alive interval : 0x0E10 -> 3600 sec 01 20 => Temperature delta : 0x20 -> 32 02 30 => RH delta : 0x30 -> 48 03 1E00 => Sensor detection interval : 0x001E -> 30 sec

Appx. 3 Frame Count 0 Content

Payload Length	17 bytes
Payload Content	Frame count 0 content Ex: 01060000000140007ff1f102e2d4f6ee 01 => command ID 06000000 => bootloader version : 0x00000006 (little-endian format) 00140000 => HW ID : 0x00001400 (little-endian format) 7ff1f102 => FW CRC : 0x02f1f17f (little-endian format) e2d4f6ee => PubKey ID : 0xeef6d4e2 (little-endian format)