

# ENERGIZER L91

Ultimate Lithium




**AA**

## General Information

<b>Classification:</b>	"Cylindrical Primary Lithium"
<b>Chemical System:</b>	Lithium/Iron Disulfide (Li/FeS <sub>2</sub> )
<b>Designation:</b>	ANSI 15-LF, IEC-FR14505 (FR6)
<b>Nominal Voltage:</b>	1.5 Volts
<b>Storage Temp:</b>	-40°C to 60°C (-40°F to 140°F)
<b>Operating Temp:</b>	-40°C to 60°C (-40°F to 140°F)*
<b>Typical Weight:</b>	15 grams (0.5 oz.)
<b>Typical Volume:</b>	8.0 cubic centimeters (0.49 cubic inch)
<b>Max Discharge:</b>	2.5 amps continuous
(single battery only)	4.0 amps pulse (2 sec on / 8 sec off)
<b>Lithium Content:</b>	Less than 1 gram
<b>Typical IR:</b>	120 to 300 milliohms (depending on method)
<b>Shelf Life:</b>	25 years at 21°C
<b>Certifications:</b>	




## Industry Standard Dimensions

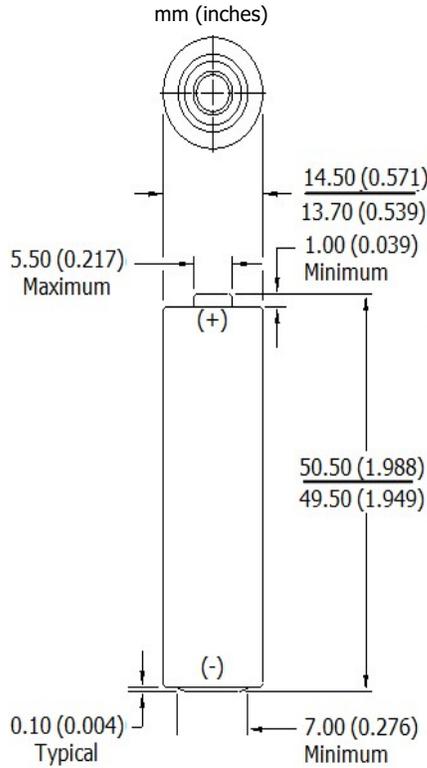





\*All data shown tested at 21°C unless otherwise stated.

## Milliamp-Hours Capacity

Constant Current Discharge to 0.8 Volts

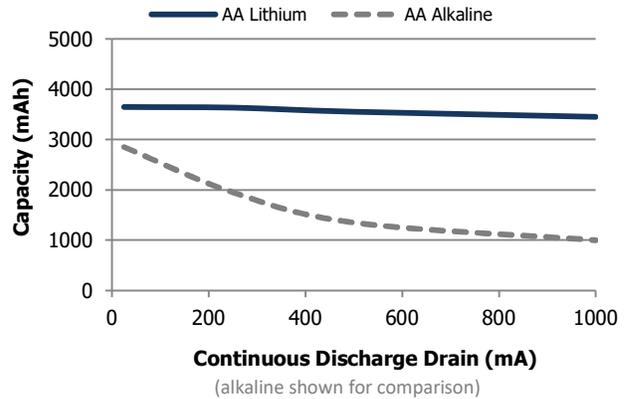

## Industry Standard Tests (21°C)

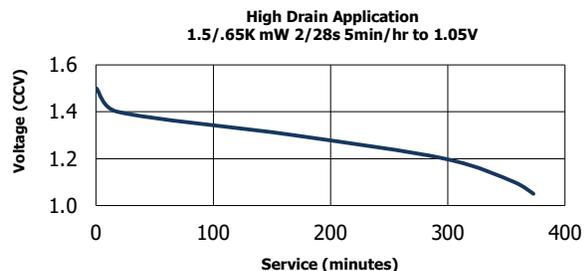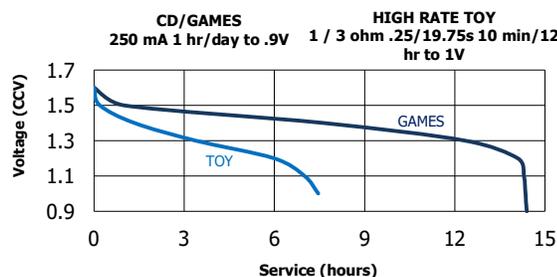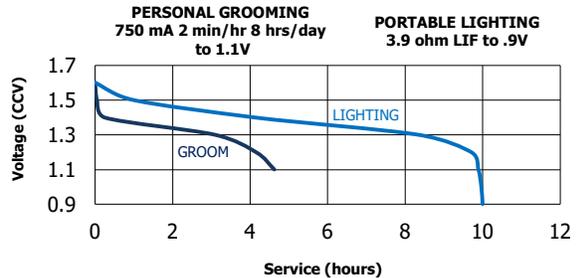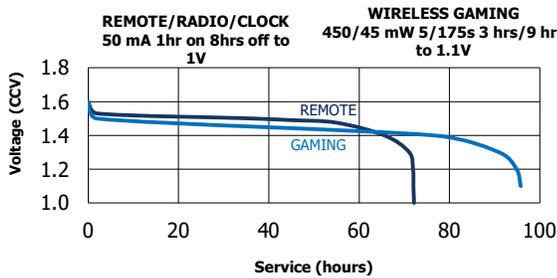

### Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.

**Contents herein do not constitute a warranty and are for reference only.**