

Field Test Device

Qualify and validate your network.



TEST

- Ensure the good positioning of your objects



MEASURE

- Check your network's coverage
- Choose the most appropriate network



FUNCTION


Network infrastructure



BENEFITS

- Immediate viewing of network coverage data
- Geolocation of measuring points
- Dedicated Web application
- A benchmark product widely praised by public network operators

PRODUCT USES

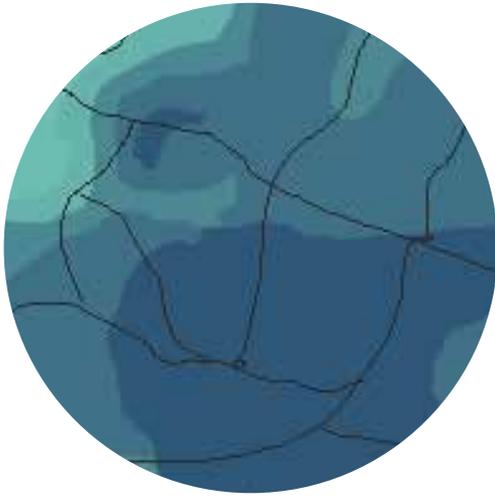

Check the availability of a operated network for its objects.



Test the feasibility of a tracking project.

TECHNICAL SPECIFICATIONS

- Viewable data: UL/DL - Channels - RSSI/SNR/ PER - GPS - Temperature
 - Self-powered and rechargeable
 - Dimensions: 180 x 72 x 21 mm
- Zone: LoRaWAN: US902-928 - AS923 / Sigfox RC4
- Operating temperature range: -25° C to +70° C
- Weight: 140g
- Radiated RF power: 14 dBm
- Sensitivity: -140dBm LoRa / -126dBm Sigfox
 - Standards:
 - AUS/NZ: AS/NZS 4268:2012
 - US: FCC- Title 47 CFR Part 15
 - CANADA: RSS-247 Issue 2

